


CAUTION


Please be aware that incorrect installation or insufficient ventilation would affect the performance and durability for all Built-in models.

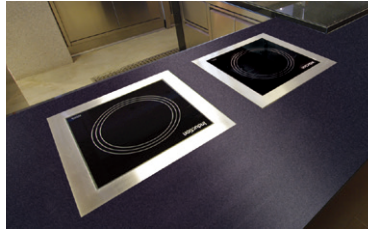


CLASSIC BUILT-IN INDUCTION HOB & WOK

Standard Features:

- Automatic safety shut-off
- Material compatibility and small object detection
- Overheating protection
- Compact size and easy to install



BI-1000NT



BI-2000NT



BI-5000N



BIW-5000N

Model ▶	BI-1000NT	BI-2000NT	BI-5000N	BIW-5000N
Dimension (W x D x H mm)	360 x 380 x 77	360 x 380 x 79	400 x 400 x 190	400 x 400 x 212
Ceramic Glass Dimension (mm)	360 x 380 x 4 (thk.)	360 x 380 x 4 (thk.)	320 x 320 x 6 (thk.)	Ø311 x 6 (thk.)
Voltage (V/Ph/Hz)	220~230/1/50~60	220~230/1/50~60	380~400/3+N/50~60	380~400/3+N/50~60
Power (kW)	1.0	2.0	5.0	5.0
Amps (A)	4.5	9.0	7.6	7.6
Cut Out Opening - External (mm)	368 x 388	368 x 388	385 x 385	385 x 385
Cut Out Opening - Internal (mm)	295 x 298	333 x 350	No	No
Control Cut Opening (W x H mm)	120 x 55	120 x 58	230 x 87	230 x 87
Net / Gross Weight (kg)	4 / 6	6 / 8	17 / 19	17 / 19
CE Approval	Yes	Yes	Yes	Yes


D SERIES BUILT-IN INDUCTION HOB & WOK

Standard Features:


- IR & NTC dual-sensor for precise temperature control
- 12 power level control
- 1-watt energy saving standby-mode
- Safety lock & automatic shut-off
- Removable air filter (washable)



BI-3500D



BID-3500D

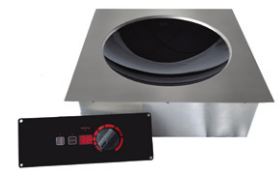

BIW-3500D

Model ▶	BI-3500D	BID-3500D	BIW-3500D
Dimension (W x D x H mm)	360 x 380 x 81	450 x 700 x 156	385 x 385 x 130
Ceramic Glass Dimension (mm)	360 x 380 x 4 (thk.)	350 x 550 x 6 (thk.)	Ø311 x 6 (thk.)
Voltage (V/Ph/Hz)	220~230/1/50~60	380~400/2+N/50~60	220~230/1/50~60
Power (kW)	3.5	3.5 x 2	3.5
Amps (A)	16	16	16
Cut Out Opening - External (mm)	362 x 382	425 x 675	355 x 355
Cut Out Opening - Internal (mm)	330 x 350	No	No
Control Cut Opening (W x H mm)	225 x 87	315 x 85	225 x 87
Net / Gross Weight (kg)	10 / 12	25 / 28	12 / 14
CE Approval	Yes	Yes	Yes