



H O L D
I N G
—
S O L
U T I
O N S

THE RMAL PRO



THERMAL PRO
BANQUET
HOLDING
& LOGISTIC
ARRANGEMENT
SERIES



HOT & COLD
HOLDING
& LOGISTIC

**A Key To Preserve Food
Quality And Dining Experience**

Banquet required advanced cooking, regeneration and holding temperature of the food. We offer different kinds of equipments to maintain food dining quality same as fresh cooking.

Heated Banquet Trolley & Cart



Scan for previewing the effect of disappearing door



BCH-10

With the patented hidden door design, it will not block the working corridor. Locking system is also available to prevent accidental falling of food when delivery.



BCR-121X (Cold)



BCH-161 (Hot)



	Code	Dimension (mm)	Electric (kW)	Shelving Size & Qty	No. of GN 2/1
Slim - Single Door	BCH-10 ¹	580 x 740 x 1250	1.45	-	10
	BCH-15 ¹	580 x 740 x 1550	1.45	-	15
Slim - Double Door	BCH-20 ¹	970 x 740 x 1250	1.45	-	20
	BCH-30 ¹	970 x 740 x 1550	1.45	-	30
Banquet Trolley - Disappear Door	BCH-161	850 x 850 x 1760	1.45	-	16
	BCR-121	850 x 850 x 1760	0.315	-	12
Banquet Trolley - Stationary Door	BCH-161X	820 x 910 x 1760	1.45	-	16
	BCR-121X	820 x 910 x 1760	0.315	-	12


Voltage

All Models 220V/SPN Operation Temperature ¹ 20~80°C ² 2~15°C

Mobile Heated Plate Dispenser



PD2-730 / PD2-920

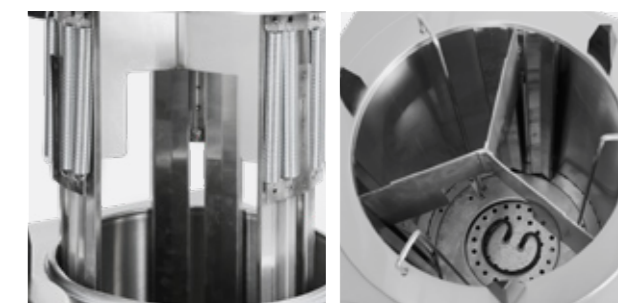

Our warmer is well equipped with heavy duty springs to sustain the heavy load of plates.

	Code	Dimension (mm)	Electric (kW)	Plate Size (mm)	Capacity (pcs)
2 Heads	PD2-730	460 x 730 x 1000	0.8	Ø240	40 x 2
	PD2-920	530 x 920 x 1000	0.8	Ø255-Ø305	40 x 2
4 Heads	PD4-730	790 x 730 x 1000	1.6	Ø240	40 x 4
	PD4-920	950 x 920 x 1000	1.6	Ø255-Ø305	40 x 4

Voltage

All Models 220V/SPN Operation Temperature 75°C

Conveyor Toaster & Slot Toaster



TT-1 / TT-1H / TT-1HL



Conveyor design applies different speed to turn piece of breads or buns into golden brown color. User can set front dropping or rear dropping of breads.



ETS-4



ETS-6

THERMAL PRO
FOOD
WARMERS
SERIES

	Code	Dimension (mm)	Electric (kW)	Productivity (pcs / hr)
Conveyor Type	TT-1	389 x 418 x 373	1.9	240
	TT-1H	389 x 418 x 373	2.3	370
	TT-1HL	389 x 500 x 373	2.85	400
Slot Type	ETS-4	330 x 285 x 250	1.8	160
	ETS-6	465 x 285 x 250	2.5	240

Voltage

All Models	220V/SPN
------------	----------



Induction Soup Cooker / Soup Warmer



BM1-290



BM1-290B



With the aid of induction warmer, heat up time is effectively shown to reduce heat up time.

	Code	Dimension (mm)	Electric (kW)	Capacity
Counter Top	BM1-290	360 x 330 x 354	1.3	11Qt
	BM2-290	630 x 330 x 354	2.6	11Qt x2
Built-in	BM1-290B	360 x 330 x 300	1.3	11Qt
	BM2-290B	630 x 330 x 300	1.3x2=2.6	11Qt x2

Voltage

All Models 220V/SPN

Operation Temperature 20-45°C

Bain Marie



BM-5737ESD + BM-103



BM-5737EVD



BM-5737EBD (Built-in)

Accessories



BM-101



BM-102



BM-103



BM-104



BM-105

	Code	Dimension (mm)	Electric (kW)
Digital	BM-5737ESD	570 x 370 x 267	2
	BM-5737EVD	370 x 570 x 267	2
	BM-5737EBD	570 x 370 x 230	2

Voltage

All Models 220V/SPN

- Accessories for Digital Version**
- BM-101: GN 1/3 Pan ; 6" H x 3nos
 - BM-102: 7Qt Soup Pot x 2nos
 - BM-103: Noodle strainer x 4nos
 - BM-104: 9-Grid Shelf x 2nos
 - BM-105: Dimsum Steam Plate

Regeneration Cabinet (Dry Heat / High Humidity)



UC-8261



FW1-081 / FW1-081A



FW1-155 / FW1-155A
FW1-176 / FW1-176A



Scan for Ultra clear glass performance and speedy (50% fast) regeneration effect

(Left): Hot air version specially designed for puff/pastry holding.
(Right): High humidity version exclusively for lunch boxes preparation. It can reach 85°C food lunch box center within 1 hour time.



	Code	Dimension (mm)	Electric (kW)	Shelving (Size & Qty)
Puff Holding / Dry Heat	UC-8261	820 x 628 x 725	2.58	595 x 510mm ; 3
Counter Top - High Humidity	FW1-081 / FW1-081A ¹	640 x 600 x 810	2.5	486 x 500mm ; 4
Upright - High Humidity	FW1-155 / FW1-155A ¹	640 x 600 x 1550	7	486 x 500mm ; 12
	FW1-176 / FW1-176A ¹	640 x 600 x 1760	7	486 x 500mm ; 15

¹ A = Ultra clear glass door model

	Voltage	IN ↓	OUT ↓	Operation Temperature
FW1 Counter Top Series / UC-8261	220V/SPN	Manual	DN15	30-85°C
FW1 Upright Series	380V/TPN	DN15	DN15	30-100°C

Display Closet (Hot / Cold / Mixed)



FOT-A06



Our display closet are in modular design for flexibility of holding food in either hot or cold condition. Various dimension from 600-1200mm for selection.

	Code*	Dimension (mm)	Electric (kW)	Shelving Dimension (mm)
Holding Version	FOT-A06	600 x 600 x 1800	2.1	550 x 550
	FOT-A10	1000 x 600 x 1800	2.8	950 x 550
	FOT-A12	1200 x 600 x 1800	4.2	1150 x 550
Cold Version	FOT-C06	600 x 600 x 1800	0.4	550 x 550
	FOT-C10	1000 x 600 x 1800	0.5	950 x 550
	FOT-C12	1200 x 600 x 1800	0.6	1150 x 550
Hot & Cold Version	FOT-R06	600 x 600 x 1800	2.5	550 x 550
	FOT-R10	1000 x 600 x 1800	3.3	950 x 550
	FOT-R12	1200 x 600 x 1800	4.8	1150 x 550

* All models come with 3 tiers shelving and 1 base tier for storage purpose.

	Voltage
All Models	220V/SPN

Heated Display Cabinet



FOTM-80BX

FOTM-80B



To keep the humidity level, we have a manual water refill cap at front panel.

	Code	Dimension (mm)	Electric (kW)	Max. Temperature
Stationary Rack	FOTM-80BX	470 x 470 x 730	1.4	80°C
Rotary Rack	FOTM-80B	470 x 470 x 730	1.4	80°C

Voltage

All Models 220V/SPN

Infra Red Strip Heater



OFW-24 / OFW-36 / OFW-48



OFW-24L / OFW-36L / OFW-48L



OFW-24DL / OFW-36DL / OFW-48DL

	Code	Dimension (mm)	Electric (W)
Single Heater	OFW-30	762 x 152 x 67	650
	OFW-36	914 x 152 x 67	800
	OFW-42	1066 x 152 x 67	950
	OFW-48	1220 x 152 x 67	1100
	OFW-54	1372 x 152 x 67	1300
	OFW-60	1524 x 152 x 67	1500
Single Heater w/ illumination	OFW-30L	762 x 250 x 67	650+15
	OFW-36L	914 x 250 x 67	800+15
	OFW-42L	1066 x 250 x 67	950+15
	OFW-48L	1220 x 250 x 67	1100+15
	OFW-54L	1372 x 250 x 67	1300+15
	OFW-60L	1524 x 250 x 67	1500+15
Dual Heater w/ illumination	OFW-30DL	762 x 400 x 67	1300+15
	OFW-36DL	914 x 400 x 67	1600+15
	OFW-42DL	1066 x 400 x 67	1900+15
	OFW-48DL	1220 x 400 x 67	2200+20
	OFW-54DL	1372 x 400 x 67	2600+20
	OFW-60DL	1524 x 400 x 67	3000+25

Voltage

All Models 220V/SPN

Accessories

- C-leg / Remote Control

Decorative Heated Lamp - Deluxe



Deluxe version equips 8mm thick cord with Ø45mm ring cord for heavy duty usage. With its metal mounting parts, improves the visual outlook in the show kitchen area.

	Code	Dimension (mm)	Electric (W)
Shade (No Rim)	DE-A	Ø150 x (730-2490)	250
	DE-B	Ø150 x (730-2490)	250
	DE-C	Ø240 x (730-2490)	250

Specify shade color when ordering.

Voltage		Certification
All Models	220V/SPN Color Selection for Shade • Black (-B) • Chrome (-C) • Red (-R) • White (-W) • Copper (-P)	CE

Decorative Heated Lamp - Classic



	Code	Dimension (mm)	Electric (W)
Adjustable Version / Fixed Cord (<2m)	DD-A	Ø175 x (600-1500)	250
	DD-B	Ø175 x (600-1500)	250
	DD-C	Ø270 x (600-1500)	250
	DD-D	Ø290 x (600-1500)	250
	DD-E	Ø290 x (600-1500)	250
	DD-F	Ø250 x (600-1500)	250
	DD-G	Ø190 x (600-1500)	250
	DD-H	Ø190 x (600-1500)	250

Custom fixed cord length is available upon request. Specify shade color when ordering.

Voltage		Certification
All Models	220V/SPN Color Selection for Shade • Black (-B) • Copper (-P) • Blue (-N) • Brass (-Q) • Red (-R) • Silver (-S) • Shiny Gold (-G)	CE

Commercial Microwave & Chocolate Tempering Machine



BM-3543CT



P18-LA

(Left): P18-LA 's power range from 500-1800W in 10 steps with 279 programs for matching different needs.

(Right): Forced air heating system to ensure rapid reach of desired temperature for chocolate tempering.



	Code	Dimension (mm)	Electric (kW)	Capacity
Microwave	P18-LA	420 x 515 x 338	1.8	18L ; 325 x 305 x 165mm H
Chocolate Tempering	BM-3543CT	350 x 432 x 208	0.16	GN 1/3 x 2nos ; 4" H

Custom fixed cord length is available upon request. Specify shade color when ordering.

Voltage			
All Models	220V/SPN	Operation Temperature	20-45°C

Electric Heated Shelves



TS-688C-G

TS-800C-G

TSB-1204

	Code	Dimension (mm)	Electric (kW)	Cut Out Size (mm)
Ceramic Glass w/ S/S Frame	TS-688C-G	369 x 369 x 75	0.2	352 x 352
	TS-800C-G	800 x 369 x 75	0.4	785 x 352
Full Ceramic Glass	TS-688CX-G	340 x 340 x 75	0.2	343 x 343
	TS-800CX-G	768 x 340 x 75	0.4	773 x 343
	TS-16050-G	600 x 500 x 75	0.4	603 x 503
	TS-18050-G	800 x 500 x 75	0.6	803 x 503
	TS-26050-G	1200 x 500 x 75	1	1204 x 503
	TS-28050-G	1600 x 500 x 75	1.2	1604 x 503
	TS-36050-G	1800 x 500 x 75	1.4	1804 x 503
Solid Top - 400 Series	TSB-0804	800 x 400 x 100	0.4	775 x 375
	TSB-1004	1000 x 400 x 100	0.6	975 x 375
	TSB-1204	1200 x 400 x 100	0.8	1175 x 375
	TSB-1504	1500 x 400 x 100	1	1475 x 375
	TSB-1804	1800 x 400 x 100	1.2	1775 x 375
Solid Top - 500 Series	TSB-0805	800 x 500 x 100	0.6	775 x 475
	TSB-1005	1000 x 500 x 100	0.8	975 x 475
	TSB-1205	1200 x 500 x 100	1	1175 x 475
	TSB-1505	1500 x 500 x 100	1.2	1475 x 475
	TSB-1805	1800 x 500 x 100	1.4	1775 x 475

Voltage	
All Models	220V/SPN