

烤鴨爐 (熱反射式)

Duck Roaster (Heat radiant Type)

特徵與優點

- 全不銹鋼外殼衛生清潔，配單層及雙層爐身供選擇
- 強力爐頭配備不銹鋼熱反射板及活動式石仔架快速加熱，運用熱反射原理，傳熱均勻
- 爐身配觀察門方便檢查
- 活動式頂蓋供裝卸食物
- 配備熄火安全制及感應線，如若火種熄滅，主氣會於約60秒內自動截斷。標準配件包括點火棒方便操作

Features and Benefits

- Full stainless steel exterior with single or double layer body construction
- Faster heat up time using powerful burner and the stainless steel heat radiant panel
- Equipped with observation door
- Easy lift-off lid and with top ventilation cover
- Flame failure device (thermocouple) cuts off the gas supply if the pilot flame is out to avoid gas leakage
- Heat radiant panel & detachable lava rock stand for even heating
- Equipped with pilot lighter





DRO-1A-GHR

CAUTION 警告

During operation, operator must not put any lava rock, charcoal or other solid obstacles on top of heat radiant panel. Splash water on heat radiant panel is also forbidden. Fail to do so will cause severe panel damage.

運作時，嚴禁擺放石球，炭或其他硬物於熱反射板上。切勿在熱反射板直接灑水。上述行為會嚴重損壞熱反射板。

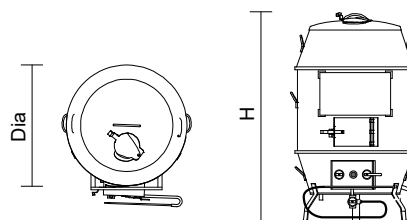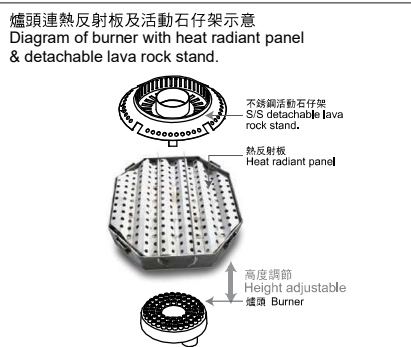

型號 Model No. ▶	單層外殼 Single Layer		雙層外殼 Double Layer 內附高密度隔熱棉 (25mm 厚) 保溫及隔熱 with fibre glass wool (25mm thick) insulation	
	DRO-1A-GHR	DRO-2A-GHR	DRO-1AD-GHR	DRO-2AD-GHR
直徑 x 高 (毫米) Diameter x Height (mm)	Ø810 x 1500	Ø910 x 1500	Ø865 x 1500	Ø965 x 1500
淨重 / 毛重 (公斤) Net / Gross Wt. (kgs)	68 / 136	82 / 160	102 / 170	123 / 205
熱輸入量 千瓦 (英熱單位 / 小時) / 操作氣壓 (水柱毫米) Heat input kW (BTU / hr.) / Operating Pressure (mm water column)				
煤氣 Town Gas	13 (44369) / 100	14 (47782) / 100	13 (44369) / 100	14 (47782) / 100
石油氣 L.P. Gas	11.5 (39249) / 280	13 (44369) / 280	11.5 (39249) / 280	13 (44369) / 280
天然氣 Natural Gas	13.5 (46075) / 200	15 (51195) / 200	13.5 (46075) / 200	15 (51195) / 200
燃料駁口 (毫米) 煤氣 / 石油氣 / 天然氣	Fuel pipe connection (mm) Town Gas / L.P. Gas / Natural Gas			
	Ø20			

備註	
此產品適合:	煤氣, 石油氣, 天然氣使用 (採購前必須列明氣體種類)
如欲查閱CE / ETL認證型號, 請參照CE / ETL系列產品目錄	

Remarks	
Fuels suit for:	Town Gas, L.P. Gas, Natural Gas (Pls specify gas type when ordering).
Please refer to CE / ETL booklet for CE / ETL certified models.	