

橋架式組合爐

為您帶來更好的烹飪體驗

Bring you a better cooking experience

Cantilever Execution





雙排雙面操作

DOUBLE ROW DOUBLE-SIDED OPERATION



Flexibility

布局美觀，節省空間；有利於廚師交流溝通，提高工作效率等特點，是開放式廚房重要布局形式之壹

Beautiful layout, saving space; It is conducive to chefs' communication and improve work efficiency. It is one of the important layout forms of open kitchen

Kitchen layout



獨特的安裝設計

UNIQUE INSTALLATION DESIGN




Different design schemes

不同的设计方案
对产品的新定义

NEW DEFINITION OF PRODUCT

產品特點

- 整体高强度不锈钢结构
- 独特的安装桥接和挂钩设计
- 多种模块选择, 可按需组合
- 底部畅通, 便于清洁

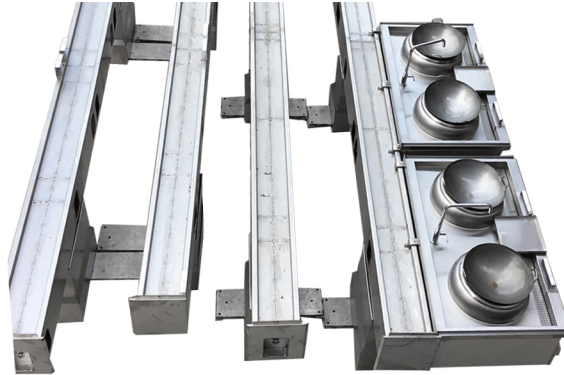

PRODUCT FEATURES

completely high strength stainless steel structure.

Specialized bridge base holder and hanger .

Multiple module for options, kinds of combination as needs.

Emptying bottom for easy cleaning

產品特點

- “壁挂式安装 墙式、立式” 可以组合多种设备
- 易于清洁, 坚固耐用
- 具有高设备和操作可靠性
- 人性化设计, 精致的制造工艺



PRODUCT FEATURES

(Wall mounted, stand floor) . kinds of heating function for options and combination.

Convenient for clean and quilt strong and durable

Humanized design and exquisite manufacturing crafts.

產品特點

- 完全适合大型和商业餐饮的特定要求
- 医院、食堂、公司、学校、企业等现场安装 提供不同的设计, 轻松进行规划和安装




PRODUCT FEATURES

Completely suitable for the catering specific requirements of Hospitals,

companies, schools, enterprises, etc provide Different designs and installation type

燃氣炒爐
Gas Wok Range



燃氣電熱/蒸爐
Gas/Electric steamer



燃氣/電熱蒸櫃
Gas/Electric Steam cabinet



燃氣矮湯爐
Gas Stock Pot Stove



電磁炒爐
Induction Wok Range



電磁矮湯爐
Induction Stock Pot



功能選配

FUNCTION SELECTION

西餐系列

WESTERN
FOOD



隨意組合

FREELY COMBINATION

中餐系列

CHINESE FOOD
SERIES



燃氣/電熱扒爐
Gas/electric griddle



燃氣平頭爐
Gas Range



燃氣/電熱炸爐
Gas/Electric Deep Fryer



電熱多功能爐
Electric multi-function furnace



燃氣/電熱意粉爐
Gas/Electric Pasta Cooker



燃氣熱板爐
Gas Solid Top



TILT SERIES

可傾式系列

可傾式湯鍋 Tilting Boiling Kettle



產品介紹

Product introduction

適用：煲湯、煲粥等烹飪方式

三種加熱方式：燃氣 | 電熱 | 蒸汽

加熱時間大約35-45分鐘左右

可選容量：80L | 100L | 150L | 200L | 300L |

Application: soup, porridge and other cooking methods

Three heating methods: gas | electric | steam

The heating time is about 35-45 minutes

Optional capacity: 80L | 100L | 150L | 200L | 300L |



燃氣系列 Gas series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	耗電量 Powerconsumption	進氣口 Intake port	進水口 Intake	容量 capacity
M-TSP80-G	1200x900x900	32kW	380V/0.2kW	DN20	DN15	80L
M-TSP100-G	1200x900x900	32kW	380V/0.2kW	DN20	DN15	100L
M-TSP150-G	1250x900x900	36kW	380V/0.2kW	DN20	DN15	150L
M-TSP200-G	1300x1050x900	40kW	380V/0.2kW	DN20	DN15	200L
M-TSP300-G	1400x1050x900	48kW	380V/0.2kW	DN20	DN15	300L

電熱系列 Electric series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	額定功率 Rated power	進水口 Intake	容量 capacity
M-TSP80-E	1200x900x900	380V	12kW	DN15	80L
M-TSP100-E	1200x900x900	380V	12kW	DN15	100L
M-TSP150-E	1250x900x900	380V	18kW	DN15	150L
M-TSP200-E	1300x1050x900	380V	24kW	DN15	200L
M-TSP300-E	1400x1050x900	380V	36kW	DN15	300L

蒸汽系列 Steam series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	耗電量 Powerconsumption	進氣口 Intake port	進水口 Intake	容量 capacity
M-TSP80-Q	1250x900x900	25kg/h	380V/0.2kW	DN20	DN15	80L
M-TSP100-Q	1250x900x900	30kg/h	380V/0.2kW	DN20	DN15	100L
M-TSP150-Q	1250x900x900	40kg/h	380V/0.2kW	DN20	DN15	150L
M-TSP200-Q	1250x900x900	45kg/h	380V/0.2kW	DN20	DN15	200L
M-TSP300-Q	1400x1050x900	65kg/h	380V/0.2kW	DN20	DN15	300L

TILT SERIES

可傾式系列

可傾式炒鍋

Tilting Bratt Pan Series



產品介紹

Product introduction

適用：煎、炒、炸、煮、燉等烹飪方式，一爐多用
兩種加熱方式：燃氣 | 電熱
可選容量：80L | 100L | 120L | 150L | 170L

Application: frying, frying, frying, boiling, stewing and other cooking methods. One stove can be used for multiple purposes
Two heating methods: Gas | Electric
Optional capacity: 80L | 100L | 120L | 150L | 170L



燃氣系列 Gas series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	耗電量 Powerconsumption	進氣口 Intake port	進水口 Intake	容量 capacity
M-TFP100-G	1200x900x900	14kW	380V/0.2kW	DN20	DN15	100L
M-TFP120-G	1600x900x900	21kW	380V/0.2kW	DN20	DN15	120L
M-TFP150-G	1600x900x900	21kW	380V/0.2kW	DN20	DN15	150L

電熱系列 Electric series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	額定功率 Rated power	進水口 Intake	容量 capacity
M-TFP100-E	1200x900x900	380V	12kW	DN15	100L
M-TFP120-E	1600x900x900	380V	18kW	DN15	100L
M-TFP150-E	1600x900x900	380V	18kW	DN15	150L

FLAT HEAD FURNACE SERIES

平頭爐系列

燃氣/電磁平頭爐 Gas / electromagnetic flat head furnace



產品介紹

全不銹鋼機身結構，防水、防潮
可調不銹鋼腳，方便安裝，放置平穩
採用SUS304#2.0mm厚工作台面，整體沖壓成型
全銅爐頭，雙圈爐頭8kW和單圈爐頭5kW，採用單雙圈爐頭交叉
配製，多種不同大小火力選擇，爐頭防堵塞
每個爐頭獨立控制，輕鬆調節火力大小
內置高效能熱電偶熄火安全裝置，設置長明火種，確保設備工
作時安全可靠
特別鑄鐵爐花設計，爐頭位置之間平面可放平底鍋，承重力強

PRODUCT INTRODUCTION

All stainless steel body structure, waterproof and moisture-proof
Adjustable stainless steel feet for easy installation and stable placement
Using SUS304 #2.0mm thick work surface, integrally deep drawn form
All-copper burners, dual-ring burners 8kW and single-ring burners 5kW. Using single and dual ring burners cross-mixing, a variety of different sizes of firepower options
Independent control of each burner, easy to adjust the firepower
Built-in high-efficiency thermocouple flameout safety device, set a permanent flame to ensure the safety and reliability of the equipment when working
Special cast iron gratings design, workable on various sizes of flat pots/pans

燃氣系列 Gas series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	進氣口 Intake port
M-LPF4N-G	400x750x850	13kW	DN20
M-LPF8N-G	800x750x850	26kW	DN20
M-LPF12N-G	1200x750x850	39kW	DN20
M-LPF8N-O-G	800x750x850	33kW	DN20
M-LPF12N-O-G	1200x750x850	46kW	DN20
M-LPF4H-G	400x900x850	13kW	DN20
M-LPF8H-G	800x900x850	26kW	DN20
M-LPF12H-G	1200x900x850	39kW	DN20
M-LPF8H-O-G	800x900x850	33kW	DN20
M-LPF12H-O-G	1200x900x850	46kW	DN20

電熱系列 Gas series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	熱負荷 thermal load
M-LPF4N-E	400x750x850	220V	4.6kW
M-LPF8N-E	800x750x850	380V	9.2kW
M-LPF12N-E	1200x750x850	380V	13.8kW
M-LPF8N-O-E	800x750x850	380V	9.2kW+6kW
M-LPF12N-O-E	1200x750x850	380V	13.8kW+6kW
M-LPF4H-E	400x900x850	220V	5.2kW
M-LPF8H-E	800x900x850	380V	10.4kW
M-LPF12H-E	1200x900x850	380V	15.6kW
M-LPF8H-O-E	800x900x850	380V	10.4kW+6kW
M-LPF12H-O-E	1200x900x850	380V	15.6kW+6kW

選配下焗爐帶字母O表示 The oven represented by the "O"

FLAT HEAD FURNACE SERIES

炒爐系列

燃氣/電磁炒爐

Bratt Pan with automatic tilting



產品介紹

採用燃燒控制器分步控制電磁閥，火種未點燃時，主氣閥不會打開；風機供風不正常，供氣不正常，意外熄火等故障，1秒鐘關閉燃氣，壹鍵式風機、電子打火和離子熄火保護設計。鼓風預混燃燒，噪音小於65分貝，燃燒充分，壹氧化碳排放量小於0.01%；燃氣和空氣混合燃燒充分，火力猛勁，熱效率高。與壹般溝風爐頭相比可節能30%以上。

每個爐頭獨立配置風機，使用行鏈風制實現風氣聯動開關，可調節供風大小。

PRODUCT INTRODUCTION

The combustion controller is used to control the solenoid valve step by step. When the fire is not ignited, the main air valve will not open; In case of abnormal air supply, abnormal air supply, accidental flameout and other faults of the fan, turn off the gas for 1 second, and the one button fan, electronic ignition and ion flameout protection design.

Blast premixed combustion, the noise is less than 65 dB, the combustion is sufficient, and the carbon monoxide emission is less than 0.01%;

The mixture of gas and air has full combustion, powerful firepower and high thermal efficiency. Compared with ordinary ditch air furnace head, it can save more than 30% energy.

Each furnace head is equipped with an independent fan. The air linkage switch is realized by using the row chain air system, and the air supply size can be adjusted.



燃氣系列 Gas series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	進氣口 Gas inlet	進水口/排水口 Water inlet / outlet	風機 Blower
CS-CRE-1-N(E)	1200x1050x810+440	42kW	DN20/DN25	DN15/DN40	220v/130w
CS-CRE-1-N(E)	1200x1200x810+440	42kW	DN20/DN25	DN15/DN40	220v/130w
CS-CRE-2-N(E)	2100x1200x810+440	42kWx2	DN40/DN40	DN15/DN40	220v/130w*2
CS-CRE-2-G(E)	2100x1200x810+440	42kWx2	DN40/DN40	DN15/DN40	220v/130w*2
CS-CRE-2-1N(E)	1800x1200x810+440	42kWx2	DN40/DN50	DN15/DN40	220v/130w*2
CS-CRE-2-1G(E)	1800x1200x810+440	42kWx2	DN40/DN50	DN15/DN40	220v/130w*2

電磁系列 Electric series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	額定功率 Rated power	進水/排水 Water inlet / drainage
MLWC-1N-E	1200x1050x810+440	380V	15kW	DN15/DN40
MLWC-1-E	1200x1050x810+440	380V	15kW	DN15/DN40
MLWC-2N-E	2100x1050x810+440	380V	30kW	DN15/DN40
MLWC-2-E	2100x1200x810+440	380V	30kW	DN15/DN40

MULTIFUNCTIONAL FURNACE SERIES

多功能爐系列

扒爐/多功能爐

Griddle / Multifunctional Oven



產品介紹

全不銹鋼機身結構；可調不銹鋼腳，放置平穩
採用 SUS 304#2.0 mm 厚工作臺面，整體沖壓成型
18mm 厚的磨砂精鋼扒板，下沈式的耐熱鋼機板無縫
焊接在臺面上；火力調節方便，扒板表面溫度分佈
均勻，升溫快
配置抽拉式活動的盛油盆，易於油脂收集及清潔；
設置隔熱板和擋火板，提高熱效率，防止外部過熱
；設置長明火種
配備安全制（熱電偶熄火保護裝置）；採用與安全
制聯動，自動脈沖電子點火

PRODUCT INTRODUCTION

Completely SS body. One punched worktop with 2mm thickness.
Adjustable SS feet convenient for install. 18mm heating board made by premium stainless steel and full welding with the worktop.
fast heating with thermal even distribution.
equipped with drawer type grease tray and drainage hole.
Set up heating insulation material to improve thermal efficiency and prevent external overheating.
Set up stand pilot fire, thermocouple protection device ,Double gas safety valves with automatic pulse electronic ignition.

燃氣系列 Gas series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	進氣口 Intake port
M-LGRF4N-G/M-LGRP4N-G	400x750x850	6kW	DN20
M-LGRF8N-G/M-LGRP8N-G	800x750x850	12kW	DN20
M-LGRF12N-G/M-LGRP12N-G	1200x750x850	18kW	DN20
M-LGRF4H-G/M-LGRP4H-G	400x900x850	7kW	DN20
M-LGRF8H-G/M-LGRP8H-G	800x900x850	14kW	DN20
M-LGRF12H-G/M-LGRP12H-G	1200x900x850	21kW	DN20

配平扒帶字幕F表示;選配坑扒帶字母P表示;選配半平半坑帶字母PF表示

Choose smooth griddle represented by the "F";Choose groove griddle represented by the "P";Choose half smooth and half groove griddle represented by the "PF".

電熱系列 Gas series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	額定功率 Rated power
M-LGRF4N-E/M-LGRP4N-E	400x750x850	380V	4.5kW
M-LGRF8N-E/M-LGRP8N-E	800x750x850	380V	9.0kW
M-LGRF12N-E/M-LGRP12N-E	1200x750x850	380V	13.5kW
M-LGRF4H-E/M-LGRP4H-E	400x900x850	380V	9kW
M-LGRF8H-E/M-LGRP8H-E	800x900x850	380V	9kW
M-LGRF12H-E/M-LGRP12H-E	1200x900x850	380V	18kW

燃氣系列 Gas series

型號 Model	規格(mm) Specification (mm)	熱負荷 thermal load	進氣口 Intake port
M-LBS4N-G	400x750x850	7kW	DN20
M-LBS8N-G	800x750x850	14kW	DN20
M-LBS12N-G	1200x750x850	21kW	DN20
M-LBS4H-G	400x900x850	9kW	DN20
M-LBS8H-G	800x900x850	18kW	DN20
M-LBS12H-G	1200x900x850	27kW	DN20

電熱系列 Gas series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	額定功率 Rated power
M-LBS4N-E	400x750x850	380V	4.5kW
M-LBS8N-E	800x750x850	380V	9.0kW
M-LBS12N-E	1200x750x850	380V	13.5kW
M-LBS4H-E	400x900x850	380V	6kW
M-LBS8H-E	800x900x850	380V	12kW
M-LBS12H-E	1200x900x850	380V	18kW

INDUCTION COOKER SERIES

電磁爐系列

燃氣/電磁炒爐

Gas/Induction Cooker



產品介紹

高檔耐熱晶化玻璃面板，美觀大方，便於清潔維護

電磁感應原理對鍋具加熱，升溫快，熱效率高達90%以上，高效節能。具有無鍋檢測，超溫保護，自動故障檢測，電壓過高過低及缺相保護等，多檔火力調節，功率漸進式可調

PRODUCT INTRODUCTION

Heat-resistant Glass ceramics plate with beautiful appearance convenient for clean .

Electromagnetic heating ,microcomputer temperature control system, thermal efficiency is over 90%

Equipped with no pot detection over temperature protection. automatic fault detection, voltage abnormally and open phase protection.

Adjustable gradual model heating type with digital display.



電磁系列 Gas series

型號 Model	規格(mm) Specification (mm)	額定電壓 Rated voltage	額定功率 Rated power
M-TEMPF4N-E	400x700x290	220V	3.5kWx2
M-TEMPF8N-E	800x700x290	380V	3.5kWx4
M-TEMPF12N-E	1200x700x290	380V	3.5kWx6
MQTS-260K	340x340x(60+20)	380V	2.6kW
MQTS-350K	350x350x(75)	380V	3.5kW
型MQTS-260K2	640x340x(60)	380V	2.6kWx2
MQTS-350K2	350x700x(75)	220V	3.5kWx2
MZTS-260T	350x410x(75+20)	220V	2.6kW
MZTS-350T	350x410(75+20)	220V	3.5kW
MZTS-260T2	700x410x(75+20)	220V	2.6kWx2
MZTS-350T2	700x410x(75+20)	220V	3.5kWx2