




# ALL-ELECTRIC KITCHEN EQUIPMENT

A : Mantru.E Industry Park,E03 Street,Sanshan,Nanhai District,Foshan City,China  
<http://www.mantruo.com> T : +86-757-81273509  
Prompt : All pictures,content,data and color are only as reference.Please in kind prevail.





Mantru.e

All Electric

Mantru.E group is specialized in All-Electric commercial kitchen equipment R&D and manufacturing since 2008. Its quality products, satisfied service and good company image have positioned Mantru.E at the high end in the industry. The company head-quarters in Shenzhen and has a 20,000 sqm factory in Canton, China.

Invested by New Energy Shenzhen Institute and related industrial funds, the company gets strong technical background and pay high attention to R&D. The number of engineers are even more than factory workers as the production lines are highly auto-mated. 12 professional labs were set up in the company to test components and products, which is unique in Chinese commercial kitchen equipment industry.

Mantru.E products include drop-in and countertop induction hobs, grills, fryers, induction/infrared ranges, satay grills, induction cauldrons, induction woks, soup stoves, steamers, pasta cookers, etc., which are all electrical-executed and eco-friendly. OEM/ODM and customizing services available.

With its quality products, experienced 4S marketing and service team, Mantru.E has built up massive sales networks of more than 400 reliable partners nationwide, from all market segments such as universities, hospitals, governments, militaries, premium hotels, restaurants, renowned companies etc. More than 30 showrooms and over 140 service centers have been set up national-wide by year 2015.

Mantru.E looks forward to cooperate with partners worldwide to succeed together and contribute more to catering industry, energy-saving and environment protection.

## CORE TECHNOLOGY

- Double Heating Efficiency ❖
- Triple Heating Area ❖
- More Heating Equably ❖
- Infrared Controlling Temperature Accurately ❖
- Achieving 800 Degree Temperature ❖

# STRENGTH ONE

## Mantru.E Core Strength

### Continuous Power Output while stir-firing

Mantru.E group is specialized in All-Electric commercial kitchen equipment R&D and manufacturing since 2008. Its quality products, satisfied service and good company image have positioned Mantru.E at the high end in the industry. The company head-quarters in Shenzhen and has a 20,000 sqm factory in Canton, China.

Invested by New Energy Shenzhen Institute and related industrial funds, the company gets strong technical background and pay high attention to R&D. The number of engineers are even more than factory workers as the production lines are highly auto-mated. 12 professional labs were set up in the company to test components and products, which is unique in Chinese commercial kitchen equipment industry.







Mantru.E products include drop-in and countertop induction hobs, grills, fryers, induction/infrared ranges, satay grills, induction cauldrons, induction woks, soup stoves, steamers, pasta cookers, etc., which are all electrical-executed and eco-friendly. OEM/ODM and customizing services available.

With its quality products, experienced 4S marketing and service team, Mantru.E has built up massive sales networks of more than 400 reliable partners nationwide, from all market segments such as universities, hospitals, governments, militaries, premium hotels, restaurants, renowned companies etc. More than 30 showrooms and over 140 service centers have been set up national-wide by year 2015.

Mantru.E looks forward to cooperate with partners worldwide to succeed together and contribute more to catering industry, energy-saving and environment protection.

Real Fire Simulation Technology  
(US International Patent Number: 61903969)


### Unique Patent Real Fire Simulation Technology

|  |   |  |
|--|---|--|
| <p><b>Advantage 1</b></p> <p><b>High Stir-Firing Power</b></p>  <p>Mantru.E: High burning power, continuous heating during stir-firing, twice heat output comparing to normal induction cookers.</p> | <p><b>Advantage 2</b></p> <p><b>3 times heating area</b></p>  <p>Large heating area, food well cooked.</p> | <p><b>Advantage 3</b></p> <p><b>Evenly Heating</b></p>  <p>Evenly heating, similar to real fire heating situation</p> |
| <p><b>VS</b></p>  <p>Normal Induction Cookers: Not enough burning power, discontinuous heating during stir-firing.</p>   | <p><b>VS</b></p>  <p>Small heating area, food not well cooked.</p>   | <p><b>VS</b></p>  <p>Normal Induction Cookers: Unevenly heating, incomplete heating area, food easy to get burnt.</p> |




## ADD Electro-magnetic Engine Leading in the Industry


### Automatically adapt to changes

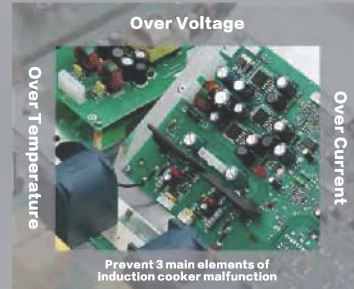ADD digital electro-magnetic engine can intelligently detect pot material, height, position etc. then changes and adapt to them automatically. Thus avoids overvoltage and overcurrent etc. to cause damages to the IGBT. The EMI wave filtering unit can absorb the surges from the power grid to protect the core parts. Specially designed thermal system ensures the electric parts working within safe temperature limit.



## Tooth Shape Coil Design Leading in the Industry

|   |   |  |
|---|---|--|
| <p><b>Advantage 1</b></p> <p><b>Tooth shape coil frame is safer</b></p>  <p>Safe distance between coil turns, heat radiates well. Normal heating coils haven't enough space between turns, easy to get burnt at the bottom or short-circuit between turns.</p> | <p><b>Advantage 2</b></p> <p><b>Woven heating wire heats more evenly</b></p>  <p>Woven pure copper heating wires, even magnetic field, heats more evenly and energy efficiency higher than wrapped wires.</p> | <p><b>Advantage 3</b></p> <p><b>PPS frame and aluminum alloy bracket is more reliable</b></p>  <p>The PPS coil frame stands temperature up to 300 degrees centigrade. It well keeps the distance between the pot and the coil. Thus keeps stable power and heat output.</p> |
|---|---|--|

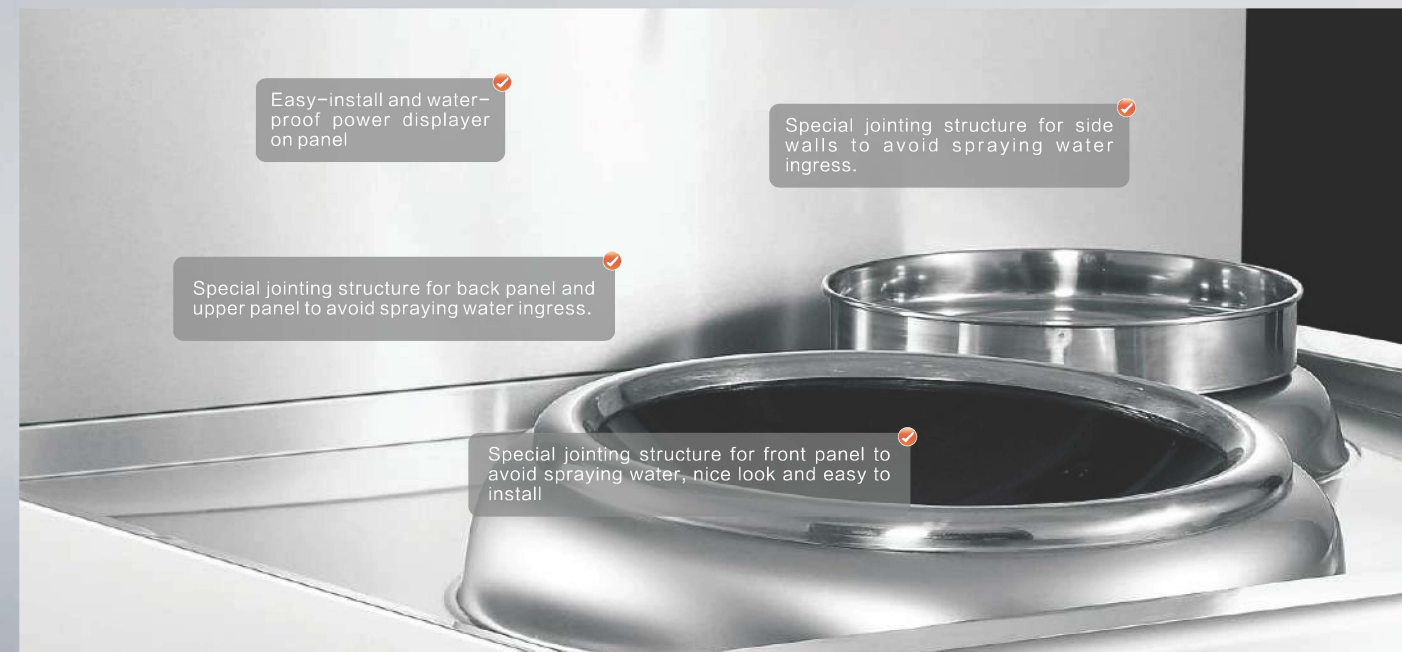

# STRENGTH TWO

## Energy-Saving Commercial Kitchen Equipment Induction Standard Labs

- ❖ Electric Control Performance Lab
- ❖ Reliability Testing Lab
- ❖ Electric Components Lab
- ❖ Gas-Electric Comparing Lab
- ❖ Operating Environment Lab
- ❖ Components Testing Lab
- ❖ Safe Testing Lab
- ❖ Water-proof Testing Lab
- ❖ Radiation Testing Lab
- ❖ EMS Lab
- ❖ Energy Efficiency Lab
- ❖ Installation Standard Lab



# STRENGTH THREE

## Three Systems of Lean Production Platform

### Automatic Assembling Lines

- ❖ 35 meter automatic assembling line
- ❖ Automatic lifting section
- ❖ Automatic winding section
- ❖ Automatic packing section

### Robot Arm Laser Welding System

- ❖ Imported laser cutting machine
- ❖ Robot arm laser welding section
- ❖ Import accurate bending section
- ❖ Robot welding assisting section

### Comprehensive Detecting System

- ❖ Intelligent voltage control
- ❖ Product data analysis
- ❖ Intelligent testing before package



# INDUCTION WOK SERIES

Mantru.e



## 400 Single Induction Wok (Single Basin)

- Real-fire simulation technology. Can achieve Stir-Frying. Heating uniformity and bigger heating area.
- 5-level power control;
- LED power display;

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C4015A-W         |
| Dimension(mm)   | 1100x1100x(810+440) |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



## 500 Single Induction Wok (Single Basin)

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C5020A-W         |
| Dimension(mm)   | 1200x1100x(810+440) |
| Rated Power(kw) | 20                  |
| Rated Voltage   | 380V 3-phase 5-line |

## 400 Dual Induction Wok (Single Basin)

|                 |                     |
|-----------------|---------------------|
| Model           | ZC2-C4030A-W        |
| Dimension(mm)   | 1800x1100x(810+440) |
| Rated Power(kw) | 15+15               |
| Rated Voltage   | 380V 3-phase 5-line |

## 500 Dual Induction Wok (Single Basin)

|                 |                     |
|-----------------|---------------------|
| Model           | ZC2-C5040A-W        |
| Dimension(mm)   | 1800x1100x(810+440) |
| Rated Power(kw) | 20+20               |
| Rated Voltage   | 380V 3-phase 5-line |



## 500&400 Dual Induction Wok(Single Basin)

|                 |                     |
|-----------------|---------------------|
| Model           | ZC2-C5435A-W        |
| Dimension(mm)   | 1800x1100x(810+440) |
| Rated Power(kw) | 20+15               |
| Rated Voltage   | 380V 3-phase 5-line |

## 400 Dual Induction Wok (Dual Basin)

|                 |                     |
|-----------------|---------------------|
| Model           | ZC2-C4030A-W2       |
| Dimension(mm)   | 2200x1100x(810+440) |
| Rated Power(kw) | 15+15               |
| Rated Voltage   | 380V 3-phase 5-line |

## 500 Dual Induction Wok (Dual Basin)

|                 |                     |
|-----------------|---------------------|
| Model           | ZC2-C5040A-W2       |
| Dimension(mm)   | 2200x1100x(810+440) |
| Rated Power(kw) | 20+20               |
| Rated Voltage   | 380V 3-phase 5-line |

# INDUCTION CAULDRON SERIES

Mantru.e



## 800 Induction Cauldron

- Real-fire simulation technology. Heating uniformity and bigger heating area.
- 5-level power control;
- LED power display;

|                 |                       |
|-----------------|-----------------------|
| Model           | ZC-C8020A / ZC-C8025A |
| Dimension(mm)   | 1100x1100x(810+440)   |
| Rated Power(kw) | 20 / 25               |
| Rated Voltage   | 380V 3-phase 5-line   |



## 600 Induction Cauldron

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C6015A           |
| Dimension(mm)   | 900x900x(810+440)   |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |

## 900 Induction Cauldron

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C9025A           |
| Dimension(mm)   | 1100x1200x(810+440) |
| Rated Power(kw) | 25                  |
| Rated Voltage   | 380V 3-phase 5-line |

## 1000 Induction Cauldron

|                 |                         |
|-----------------|-------------------------|
| Model           | ZC-C10025A / ZC-C10030A |
| Dimension(mm)   | 1300x1300x(810+440)     |
| Rated Power(kw) | 25 / 30                 |
| Rated Voltage   | 380V 3-phase 5-line     |



## 1200 Induction Cauldron

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C12030A          |
| Dimension(mm)   | 1400x1500x(810+440) |
| Rated Power(kw) | 30                  |
| Rated Voltage   | 380V 3-phase 5-line |

## Temperature-Control Induction Cauldron

|                 |                             |
|-----------------|-----------------------------|
| Model           | ZC-C8020A-DW / ZC-C8025A-DW |
| Dimension(mm)   | 1100x1100x(810+440)         |
| Rated Power(kw) | 20 / 25                     |
| Rated Voltage   | 380V 3-phase 5-line         |

## 800 Dual Induction Cauldron

|                 |                         |
|-----------------|-------------------------|
| Model           | ZC2-C8040A / ZC2-C8050A |
| Dimension(mm)   | 2200x1100x(810+440)     |
| Rated Power(kw) | 20+20 / 25+25           |
| Rated Voltage   | 380V 3-phase 5-line     |

# INDUCTION SOUP STOVE SERIES

Mantru.e



## 200L Tilting Soup Stove

- Real-fire simulation technology. Heating uniformity and bigger heating area.
- 5-level power control;
- LED power display;

|                 |                     |
|-----------------|---------------------|
| Model           | ZT-T20025A-Y        |
| Dimension(mm)   | 1300x980x1090       |
| Rated Power(kw) | 25                  |
| Rated Voltage   | 380V 3-phase 5-line |



## Single Burner Induction Soup Stove

|                 |                     |
|-----------------|---------------------|
| Model           | ZT-C15A             |
| Dimension(mm)   | 700x850x(530+720)   |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



## Time-Control Soup Stove

|                 |                     |
|-----------------|---------------------|
| Model           | ZT-C15S             |
| Dimension(mm)   | 700x850x(530+720)   |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



## Dual Burners Induction Soup Stove

|                 |                     |
|-----------------|---------------------|
| Model           | ZT2-C30A            |
| Dimension(mm)   | 1400x850x(530+720)  |
| Rated Power(kw) | 15+15               |
| Rated Voltage   | 380V 3-phase 5-line |

# STEAMING SERIES

Mantru.e



## 12-tray Induction Rice Steamer

- Induction heating, create steam in 3 minutes;
- Low water level and dry-fire protection;
- 4cm warming layer, reduce heat dissipation, increase heating efficiency;

|                 |                     |
|-----------------|---------------------|
| Model           | ZZ-C12A             |
| Dimension(mm)   | 820x900x1750        |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



## 24-tray Induction Rice Steamer

|                 |                     |
|-----------------|---------------------|
| Model           | ZZ2-C24A            |
| Dimension(mm)   | 1400x900x1750       |
| Rated Power(kw) | 25                  |
| Rated Voltage   | 380V 3-phase 5-line |



## 24-tray Electric Rice Steamer

|                 |                     |
|-----------------|---------------------|
| Model           | ZZ2-D24A            |
| Dimension(mm)   | 1150x840x1650       |
| Rated Power(kw) | 24                  |
| Rated Voltage   | 380V 3-phase 5-line |



## Electric Dim-Sum Steamer

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-D18A             |
| Dimension(mm)   | 840x900x795         |
| Rated Power(kw) | 18                  |
| Rated Voltage   | 380V 3-phase 5-line |



## 900/1100 Three-Container Sea Food Steamer

|                 |                              |
|-----------------|------------------------------|
| Model           | ZZ3-C9030A / ZZ3-C10030A     |
| Dimension(mm)   | 900x900x1860 / 1100x900x1860 |
| Rated Power(kw) | 30                           |
| Rated Voltage   | 380V 3-phase 5-line          |



## 1300 Three-Container Sea Food Steamer

|                 |                     |
|-----------------|---------------------|
| Model           | ZZ3-C13030A         |
| Dimension(mm)   | 1300x900x1750       |
| Rated Power(kw) | 30                  |
| Rated Voltage   | 380V 3-phase 5-line |

# ELECTRIC BBQ GRILL SERIES

Mantru.e



## 800/1200 BBQ Grill

- High-temperature (nearly 900 Degree) and smokeless BBQ design;
- During operating, the heating pipe is with safe voltage and prevent to get electric shock;
- Heating pipe is anti-broken;

|                 |                            |
|-----------------|----------------------------|
| Model           | ZK-D12A                    |
| Dimension(mm)   | 800x520x450 / 1200x520x450 |
| Rated Power(kw) | 12/14                      |
| Rated Voltage   | 380V 3-phase 5-line        |



## BBQ Grill

|                 |                     |
|-----------------|---------------------|
| Model           | ZK3-D9012A          |
| Dimension(mm)   | 900x800x ( 800+30 ) |
| Rated Power(kw) | 12                  |
| Rated Voltage   | 380V 3-phase 5-line |



# INDUCTION/INFRARED RANGE SERIES

## Mantru.e

### 4-Burner Infrared Range



- Higher temperature, can reach 600 degree temperature.
- While reach 600 degree still can operate ceaseless.
- Can be suitable for different material cooker.

|                 |                     |
|-----------------|---------------------|
| Model           | ZT4-H9012A          |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 3x4                 |
| Rated Voltage   | 380V 3-phase 5-line |



### Dual Burner Induction Range

|                 |                     |
|-----------------|---------------------|
| Model           | ZT2-C9007A          |
| Dimension(mm)   | 450x900x(810+120)   |
| Rated Power(kw) | 3.5x2               |
| Rated Voltage   | 380V 3-phase 5-line |



### Dual Burner Infrared Range

|                 |                     |
|-----------------|---------------------|
| Model           | ZT2-H9006A          |
| Dimension(mm)   | 450x900x(810+120)   |
| Rated Power(kw) | 3x2                 |
| Rated Voltage   | 380V 3-phase 5-line |



### 4 Burner Induction Range

|                 |                     |
|-----------------|---------------------|
| Model           | ZT4-C9014A          |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 3.5x4               |
| Rated Voltage   | 380V 3-phase 5-line |



### 6 Burner Induction Range

|                 |                     |
|-----------------|---------------------|
| Model           | ZT6-C9021A          |
| Dimension(mm)   | 1200x900x(810+120)  |
| Rated Power(kw) | 3.5x6               |
| Rated Voltage   | 380V 3-phase 5-line |



### 6 Burner Infrared Range

|                 |                     |
|-----------------|---------------------|
| Model           | ZT6-H9018A          |
| Dimension(mm)   | 1200x900x(810+120)  |
| Rated Power(kw) | 3x6                 |
| Rated Voltage   | 380V 3-phase 5-line |

# 900MM DEPTH SERIES

## Mantru.e



900mm Induction Wok

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C4015A9          |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm 600 Induction Cauldron

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C6015A9          |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Induction Dim-Sum Steamer

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C18A9            |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 18                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Electric Dim-Sum Steamer

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-D18A9            |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 18                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Electric Noodles Cooker

|                 |                     |
|-----------------|---------------------|
| Model           | XM-D9018A           |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 18                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Electric Bain Marie

|                 |                     |
|-----------------|---------------------|
| Model           | XW2-D9006A          |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 6                   |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Electric Dual Tank Fryer

|                 |                     |
|-----------------|---------------------|
| Model           | XZ2-D9024A          |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 24                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Electric Griddle

|                 |                     |
|-----------------|---------------------|
| Model           | XP-D9012A           |
| Dimension(mm)   | 800x900x(810+120)   |
| Rated Power(kw) | 12                  |
| Rated Voltage   | 380V 3-phase 5-line |



900mm Dual Tank Noodles Cooker

|                 |                     |
|-----------------|---------------------|
| Model           | ZT2-C5030A9-W       |
| Dimension(mm)   | 1800x900x(810+120)  |
| Rated Power(kw) | 15+15               |
| Rated Voltage   | 380V 3-phase 5-line |

# TABLETOP INDUCTION COOKER SERIES

## Mantru.e

### 5KW Tabletop Induction Hob



- Real-fire simulation technology. Heating uniformity and bigger heating area.
- 5-level power control.
- Whole stainless steel shell without connecting gap.

|                 |             |
|-----------------|-------------|
| Model           | ZT-C405A    |
| Dimension(mm)   | 380x420x130 |
| Rated Power(kw) | 5           |
| Rated Voltage   | 220V        |



### 3.3KW Tabletop Induction Wok

|                 |             |
|-----------------|-------------|
| Model           | ZC-C333A    |
| Dimension(mm)   | 380x420x180 |
| Rated Power(kw) | 3.3         |
| Rated Voltage   | 220V        |

### 3.3KW Tabletop Induction Hob

|                 |             |
|-----------------|-------------|
| Model           | ZT-C333A    |
| Dimension(mm)   | 350x440x113 |
| Rated Power(kw) | 3.3         |
| Rated Voltage   | 220V        |

### 5KW Tabletop Induction Wok

|                 |             |
|-----------------|-------------|
| Model           | ZC-C405A    |
| Dimension(mm)   | 380x420x180 |
| Rated Power(kw) | 5           |
| Rated Voltage   | 220V        |



### 8KW Tabletop Induction Hob

|                 |                     |
|-----------------|---------------------|
| Model           | ZT-C408A            |
| Dimension(mm)   | 500x600x300         |
| Rated Power(kw) | 8                   |
| Rated Voltage   | 380V 3-phase 5-line |

### 8KW Tabletop Induction Wok

|                 |                     |
|-----------------|---------------------|
| Model           | ZC-C408A            |
| Dimension(mm)   | 500x600x310         |
| Rated Power(kw) | 8                   |
| Rated Voltage   | 380V 3-phase 5-line |

### Dual Burner Induction Hob

|                 |             |
|-----------------|-------------|
| Model           | ZT2-C307A   |
| Dimension(mm)   | 720x440x113 |
| Rated Power(kw) | 3.3x2       |
| Rated Voltage   | 220V        |

# DROP-IN INDUCTION COOKER SERIES

Mantru.e

## Dual Drop-in Induction Wok



|                                      |             |
|--------------------------------------|-------------|
| Model                                | ZC2-C307A-Q |
| Dimension(mm)                        | 850x400x175 |
| Rated Power(kw)                      | 3.3x2       |
| Rated Voltage                        | 220V        |
| Equipment Assembling Hole Size(mm)   | 823x373     |
| Control Box Size(mm)                 | 128x64      |
| Control Box Assembling Hole Size(mm) | 141x70      |



## 3.3KW Drop-in Induction Hob

|                                      |             |
|--------------------------------------|-------------|
| Model                                | ZT-C333A-Q  |
| Dimension(mm)                        | 340x340x132 |
| Rated Power(kw)                      | 3.3         |
| Rated Voltage                        | 220V        |
| Equipment Assembling Hole Size(mm)   | 330x330     |
| Control Box Size(mm)                 | 128x64      |
| Control Box Assembling Hole Size(mm) | 141x70      |

## 3.3KW Drop-in Induction Wok

|                                      |             |
|--------------------------------------|-------------|
| Model                                | ZC-C333A-Q  |
| Dimension(mm)                        | 380x380x175 |
| Rated Power(kw)                      | 3.3         |
| Rated Voltage                        | 220V        |
| Equipment Assembling Hole Size(mm)   | 370x370     |
| Control Box Size(mm)                 | 128x64      |
| Control Box Assembling Hole Size(mm) | 141x70      |



## Drop-in Induction Dual Burner Combine (Control Panel Separated)

|                                      |             |
|--------------------------------------|-------------|
| Model                                | ZC2-C307A-Q |
| Dimension(mm)                        | 850x400x175 |
| Rated Power(kw)                      | 3.3x2       |
| Rated Voltage                        | 220V        |
| Equipment Assembling Hole Size(mm)   | 840x390     |
| Control Box Size(mm)                 | 128x64      |
| Control Box Assembling Hole Size(mm) | 141x70      |

## Drop-in Induction Dual Burner Combine

|                                      |             |
|--------------------------------------|-------------|
| Model                                | ZC2-C307A-Q |
| Dimension(mm)                        | 850x500x175 |
| Rated Power(kw)                      | 3.3x2       |
| Rated Voltage                        | 220V        |
| Equipment Assembling Hole Size(mm)   | 840x490     |
| Control Box Size(mm)                 | 128x64      |
| Control Box Assembling Hole Size(mm) | 141x70      |

# CUSTOMIZE SERIES

## Mantru.e



### Bun Griddle

|                 |                     |
|-----------------|---------------------|
| Model           | ZT-C4508A           |
| Dimension(mm)   | 750x800x(800+75)    |
| Rated Power(kw) | 8                   |
| Rated Voltage   | 380V 3-phase 5-line |



### Auto-Lift Pasta Cooker

|                 |                     |
|-----------------|---------------------|
| Model           | ZM-D9015A           |
| Dimension(mm)   | 600x900x(810+120)   |
| Rated Power(kw) | 15                  |
| Rated Voltage   | 380V 3-phase 5-line |



### Temperature-Sense Range

|                 |                     |
|-----------------|---------------------|
| Model           | ZT6-CH19A           |
| Dimension(mm)   | 1200x800x810        |
| Rated Power(kw) | 3x4+3.5x2           |
| Rated Voltage   | 380V 3-phase 5-line |